



Industrial space

29 700 m², Žďár nad Sázavou, Velká Bíteš

Ask for price



STANDARD TECHNICAL SPECIFICATION

SUPPORTING STRUCTURE • Pad or pile foundations, insulated plinth, ground up to 30 cm above floor • Prefabricated concrete columns in 12 x 24 m grid per segment • Prefabricated concrete or steel roof beams, clear height of 10 m	FLOOR • Floor: reinforced concrete floor, PE membrane, 100 mm, 30 mm thick, surface treated with hardener • Load capacity of 50 kN/m², 60 kN point load • Flatness according to DIN 1822, table 3, line 3	ROOF • Corrugated steel sheets, mineral wool insulation, PVC membrane • Free load capacity of 15 kg/m² for clients' installations • Min. 2% of slope in warehouse area • Synthetic drainage system, emergency overflow	FAÇADE • Horizontal sandwich panels with mineral wool insulation • Prefabricated concrete facade around docks to approx. 4 m height • Double glazed windows in offices with insulated PVC profiles	DOCKS • 1x electrically operated 3 x 3.2 m dock for each 1 500 sqm of hall • Each dock equipped with hydraulic leveler, 40 kN capacity, PVC shelter, wheel guides • 1x electrically operated 3 x 4.2 m drive-in gate for each 1 500 sqm of hall
---	--	---	---	--

HALL INSTALLATIONS • Gas tubes, burners or infrared gas radiators, heating according to norms for warehousing • 220V gridlines under roof, 3-phase grid and pumps • 200 lux LED lighting including influence of climate insulation • 1x 400 kVA dry transformer station per each 25 000 sqm of hall	PRODUCTION UPGRADE (OPTIONAL) • Increased facade and roof insulation • Heating and ventilation in accordance with code for manufacturing (assembled) • 300 lux LED lighting including influence of climate insulation • Increased percentage of daylight area	OFFICES • 2 floor custom designed in hall, incl. offices, social, locker rooms, day rooms, exit furniture and appliances • Alternative entrance door with canopy to entrance lobby • Thin, opaque or PVC floor surfaces, suspended mineral ceiling panels • Solid floor with covered terrace, wall tiles, and floor accessories • PVC color trays below windows, 1x 220V socket per work place • Server room with 2 split units and antistatic PVC floor • Top coating	OUTSIDE AREAS • Hard areas from concrete panels, sloped for drainage • 2m-high fence, wave, entrance barriers and manual gate • Green areas with grass, bushes, and trees
--	--	---	--



Industrial space

29 700 m², Žďár nad Sázavou, Velká Bíteš

Ask for price

Total area	29 700 m ²
Available area for rent	29 700 m ²
Min. area	29 700 m ²
Ceiling height	12.5 m
Floor loading capacity	5 t/m ²
Column grid structure	—
Structure	Reinforced concrete structure
PENB	G
Reference number	107447

29,700 m² of industrial, warehouse and office space for lease in the logistic park. The premises are suitable for light manufacturing and warehousing. Photos are illustrative. Available in 18–24 months.

Location:

The park is located in an industrial zone in the northwest of the village of Košíkov, west of Brno. Highway D1 (Prague-Brno-Ostrava) exit 162 is 1 km away. Public transport (bus) is within walking distance.

Features and Services:

- Flexible units (storage / office / light production / showroom)
- 82 x car parking places
- Retention pond


Storage/Industrial space:

- 4 x Drive-in
- 54 x Loading docks
- Floor loading capacity 5 t/m²
- Clear height 12,5 m
- Column grid structure 12x24 m
- 200 Lux LED lighting
- ESFR sprinkler system

Office:

- Office space with facilities according to the clients requirements

Lessee pays no commission.

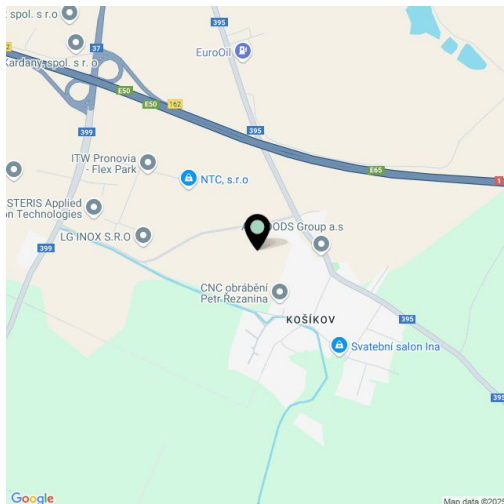



Industrial space

29 700 m², Žďár nad Sázavou, Velká Bíteš

Ask for price

