



STANDARD TECHNICAL SPECIFICATION

SUPPORTING STRUCTURE <ul style="list-style-type: none"> • Pad on pile foundations, insulated plinth, slabs on 150mm above floor • Prefabricated concrete columns on 12 x 24 cm grid per span • Prefabricated concrete or steel roof beams, clear height of 10m 	FLOOR <ul style="list-style-type: none"> • Fibre reinforced concrete floor PE membrane, 100 mm, 150 mm thick, surface treated with hardener • Load capacity of 25 kN/m², 40 kN point load • Flatness according to DIN 1822, table 3, line 3 	ROOF <ul style="list-style-type: none"> • Corrugated steel sheets, mineral wool insulation, PVC membrane • Free load capacity of 15 kg/m² for clients installation • Min. 2% of slope in warehouse area • Synthetic drainage system, emergency overflow 	FAÇADE <ul style="list-style-type: none"> • Horizontal sandwich panels with mineral wool insulation • Prefabricated concrete facade around docks to approx. 4.5m height • Double glazed windows in offices with insulated PVC profiles 	DOCKS <ul style="list-style-type: none"> • 1x electrically operated 3 x 3.2 m dock for each 1 500 sqm of hall • Each dock equipped with hydraulic leveler, 40 kN capacity PVC roller, wheel guides • 1x electrically operated 1.5 x 4.2 m drive in gate for each 1 500 sqm of hall
HALL INSTALLATIONS <ul style="list-style-type: none"> • Gas safety beacons or infrared gas radiators, heating according to norms for warehousing • 220V 3-phase sockets under roof, 380V 3-phase certified bank and pumps • 200 kVA 120 lighting including influence of direct insolation • 1x 400 kVA dry transformer station per each 1-2 000 sqm of hall 	PRODUCTION UPGRADE (OPTIONAL) <ul style="list-style-type: none"> • Increased facade and roof insulation • Heating and ventilation in accordance with code for manufacturing warehousing • 300 kVA 120 lighting including influence of direct insolation • Increased percentage of skylights area 	OFFICES <ul style="list-style-type: none"> • 2 level custom designed in hall, incl. offices, social, locker rooms, day rooms, exit furniture and equipment • Aluminium entrance door with access to entrance lobby • Thin carpet or PVC floor surfaces, suspended mineral wool panels • Solid Form with raised, fabric, cell tile, and basic accessories • PVC color floor below windows, 1x 220V socket per work place • Server room with 1 split units and entrance PVC floor • Top coating 	OUTSIDE AREAS <ul style="list-style-type: none"> • Hard areas from concrete paving, sloped for drainage • 200 mm high curb, entrance barriers and metal gate • Green areas with grass, bushes, and trees 	



Skladové prostory

7 155 m², Česká Lípa, Nový Bor, Nemocniční

Cena na vyžádání

Celková plocha	7 155 m ²
Volná plocha k pronájmu	7 155 m ²
Čistá výška stropu	10 m
Nosnost podlah	5 t/m ²
Modul sloupů	—
Konstrukce	Železobetonová konstrukce
PENB	G
Referenční číslo	107283

7 155 m² skladových, výrobních a kancelářských prostor k pronájmu v Novém Boru. Prostory jsou vhodné pro logistiku, distribuci nebo lehkou výrobu. K dispozici do 12 měsíců po podpisu smlouvy.

Lokalita:

Park se bude nacházet na silnici I/9 spojující Prahu, Neratovice, Mělník, Českou Lípu, Nový Bor a Rumburk. Dále pokračuje přes hraniční přechod Rumburk/Ebersbach-Neugersdorf do Saska. Na území města se nachází jediná železniční stanice Nový Bor obsluhovaná dálkovou linkou R22 a regionální linkou L4.

Vybavení a služby:

- flexibilní jednotky (sklad / lehká výroba / kancelář / showroom)
- správa nemovitosti přímo v areálu
- údržba budov
- 32 parkovacích míst
- 5 parkovacích míst pro kamiony
- 2 retenční rybníky


Skladové/výrobní prostory:

- nosnost podlahy 5 t/m²
- světlá výška 10 m
- 14 nakládacích doků s vyrovnávacím můstkem
- modul sloupů 12x24 m
- LED osvětlení 200 Lux
- ESFR spinkler system

Kanceláře:

- kancelářské prostory na míru
- klimatizace

Nájemce neplatí provizi.

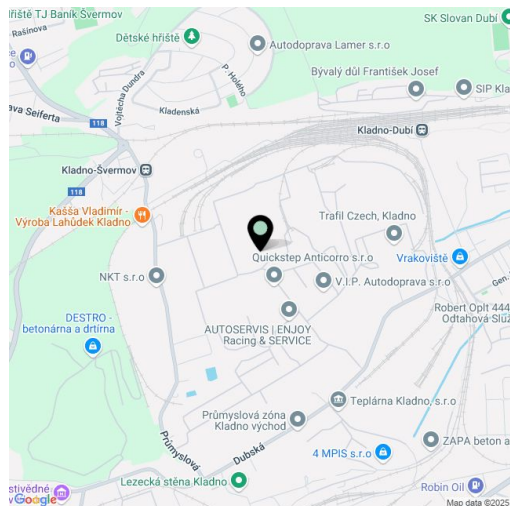



7 155 m², Česká Lípa, Nový Bor, Nemocniční

TOTAL BUILT-UP AREA

BUILDING A1 47,308 sq m
BUILDING A2 24,586 sq m
BUILDING B 14,323 sq m
BUILDING C 7,155 sq m
BUILDING C 1,244 sq m

WAREHOUSE

Column grid
 Clear height
 Floor loading
 ESFR sprinkler system
 LED lighting

12 m x 24 m
 10 m
 5 t/sq m

SUSTAINABILITY TRENDS

BREEAM New Construction level Excellent
 Option for heat pumps and photovoltaics

