



STANDARD TECHNICAL SPECIFICATION

SUPPORTING STRUCTURE <ul style="list-style-type: none"> • Pad or pile foundations, insulated plinth, slabs on 150mm above floor • Prefabricated concrete columns in 12 x 24 cm grid per span • Prefabricated concrete or steel roof beams, clear height of 10m 	FLOOR <ul style="list-style-type: none"> • Fibre reinforced concrete floor PE membrane, 100 joints, 100mm thick, surface treated with hardener • Load capacity of 25 kN/qm, 60 kN point load • Flatness according to DIN 1822, table 3, line 3 	ROOF <ul style="list-style-type: none"> • Corrugated steel sheets, mineral wool insulation, PVC membrane • Free load capacity of 15 kg/qm for clients installation • Min. 2% of slope in warehouse area • Synthetic drainage system, emergency overflow 	FAÇADE <ul style="list-style-type: none"> • Horizontal sandwich panels with mineral wool insulation • Prefabricated concrete facade around docks to approx. 4.5m height • Double glazed windows in offices with insulated PVC profiles 	DOCKS <ul style="list-style-type: none"> • 1x electrically operated 3 x 3.2 m dock for each 1 500 sqm of hall • Each dock equipped with hydraulic leveler, 60 kN capacity PVC roller, wheel guides • 1x electrically operated 1.5 x 4.2 m drive-in gate for each 1 500 sqm of hall
HALL INSTALLATIONS <ul style="list-style-type: none"> • Gas safety beacons or infrared gas radiators, heating according to norms for warehousing • 120V lighting on ceiling, roof, 240V lighting certified bank and pumps • 200 lux LED lighting including influence of direct irradiation • 1x 400 kVA dry transformer station per each 1-2 000 sqm of hall 	PRODUCTION UPGRADE (OPTIONAL) <ul style="list-style-type: none"> • Increased facade and roof insulation • Heating and ventilation in accordance with code for manufacturing warehousing • 300 lux LED lighting including influence of direct irradiation • Increased percentage of drylights area 	OFFICES <ul style="list-style-type: none"> • 2 best custom designed in hall, incl. offices, social, locker rooms, day room, exit furniture and equipment • Aluminium entrance door with access to entrance lobby • Thin carpet or PVC floor surfaces, suspended mineral wool ceiling • Solid Form with raised floor, cell file, and basic accessories • PVC color trays below windows, 1x 220V socket per work place • Server room with 1 split units and antistatic PVC floor • Trip cooling 	OUTSIDE AREAS <ul style="list-style-type: none"> • Hard areas from concrete paving, sloped for drainage • 200mm high curb, entrance barriers and metal gate • Green areas with grass, bushes, and trees 	



Skladové prostory

1 244 m², Česká Lípa, Nový Bor, Nemocniční

Cena na vyžádání

Celková plocha	1 244 m ²
Volná plocha k pronájmu	1 244 m ²
Čistá výška stropu	10 m
Nosnost podlah	5 t/m ²
Modul sloupů	—
Konstrukce	Železobetonová konstrukce
PENB	G
Referenční číslo	107284

1 244 m² skladových, výrobních a kancelářských prostor k pronájmu v Novém Boru. Prostory jsou vhodné pro logistiku, distribuci nebo lehkou výrobu. K dispozici do 12 měsíců po podpisu smlouvy.

Lokalita:

Park se bude nacházet na silnici I/9 spojující Prahu, Neratovice, Mělník, Českou Lípu, Nový Bor a Rumburk. Dále pokračuje přes hraniční přechod Rumburk/Ebersbach-Neugersdorf do Saska. Na území města se nachází jediná železniční stanice Nový Bor obsluhovaná dálkovou linkou R22 a regionální linkou L4.

Vybavení a služby:

- flexibilní jednotky (sklad / lehká výroba / kancelář / showroom)
- správa nemovitosti přímo v areálu
- údržba budov
- 9 parkovacích míst
- parkovací místa pro kamiony
- retenční rybník


Skladové/výrobní prostory:

- nosnost podlahy 5 t/m²
- světlá výška 10 m
- modul sloupů 12x24 m
- LED osvětlení 200 Lux
- ESFR spinkler system

Kanceláře:

- kancelářské prostory na míru
- klimatizace

Nájemce neplatí provizi.

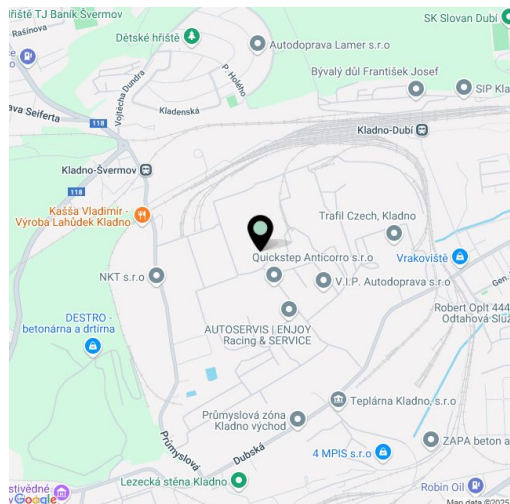

1244 m², Česká Lípa, Nový Bor, Nemocniční

TOTAL BUILT-UP AREA

BUILDING A1
BUILDING A2
BUILDING B
BUILDING C

47,308 sq m
24,586 sq m
14,323 sq m
7,155 sq m
1,244 sq m

WAREHOUSE

Column grid
Clear height
Floor loading
ESFR sprinkler system
LED lighting

12 m x 24 m
10 m
5 t/sq m

SUSTAINABILITY TRENDS

BREEAM New Construction level Excellent
Option for heat pumps and photovoltaics

