

Industrial space

Ask for price

15 622 m², Česká Lípa, Zákupy, Nádražní



Industrial space

Ask for price

15 622 m², Česká Lípa, Zákupy, Nádražní

Total area	15 622 m ²
Min. area	5 000 m ²
Ceiling height	12.4 m
Floor loading capacity	5 t/m ²
Column grid structure	—
Structure	Reinforced concrete structure
PENB	G
Reference number	40059

This industrial area offers industrial, storage and office space for lease in the northern part of the Czech Republic near the town of Zákupy. The park will offer a new modern class A industrial hall with more than 15,000 sq.m. for lease. The hall can be divided into smaller parts. The premises are suitable for logistics, distribution warehousing and light production. Construction will be carried out on a built-to-lease basis and according to tenant's requirements. Handover of the building is possible within 9 months after the signature of a Future Lease Agreement.

Location:

The area is located in the municipality of Zákupy, near the industrial zone in Česká Lípa and in the near proximity of highway 9 and thus enables perfect connection to Germany and Poland. Bus stop within walking distance.

Features and Services:

- Flexible units (storage / office / light production / showroom)
- Onsite property management
- Park maintenance
- 146 parking spaces


Storage/Industrial space:

- Floor loading capacity 5 T/sq.m
- Clear height up to 12.4 m
- 27 x docks doors
- 3 x drive in doors
- Min. 2% of skylights in warehouse area
- Column grid structure 24x12 m
- 200 Lux LED lighting
- ESFR sprinkler system

Office:


- Office space according to the client's requirements
- Air-conditioning

Lessee pays no commission.

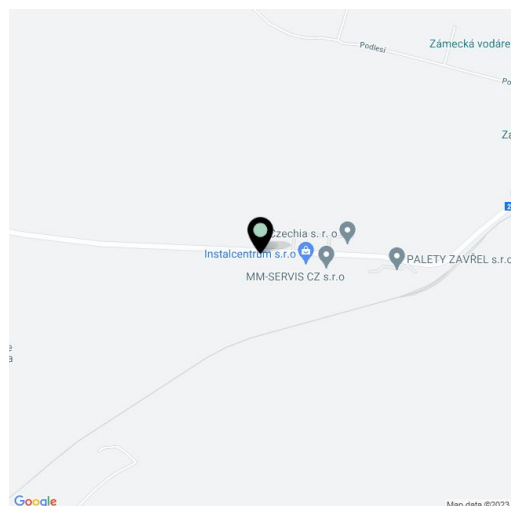

Development concept

Total built-up area	15 628 sqm
Building	15 628 sqm
Car parking places	146
Dock doors	27
Drive-in doors	3
SUSTAINABILITY TRENDS	
LED lighting	
BREEAM Very Good certified	
WAREHOUSE	
Column grid	12 m x 24 m
Light intensity in the hall	200 lux
Skylights min	2%
Floor loading	5t/sqm
OFFICE PREMISES	
Clear height	2,7 m
Light intensity	500 lux
Build to suit	

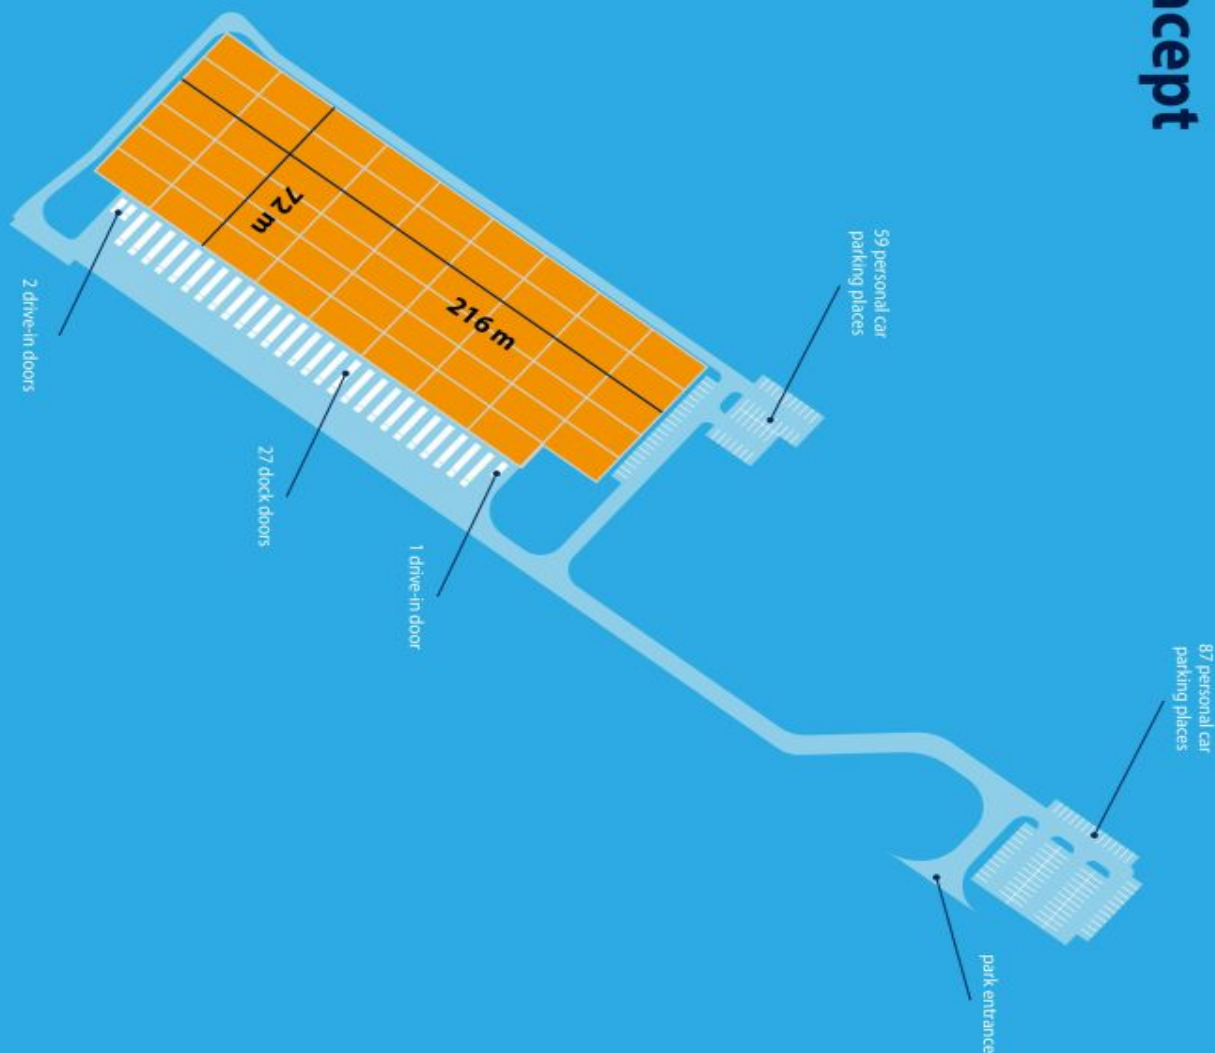

15 622 m², Česká Lípa, Zákupy, Nádražní

STANDARD TECHNICAL SPECIFICATION

SUPPORTING STRUCTURE

- Pad or pilot foundations, insulated plinth panels up to 30cm above floor
- Prefabricated concrete columns in 12 x 24 m grid or per layout
- Prefabricated concrete or steel roof beams, clear height of 10m

FLOOR

- Fibre reinforced concrete floor, PE membrane, cut joints, 18cm thick, surface treated with hardener
- Load capacity of 50 kN/sqm, 60 kN point load
- Flatness according to DIN 1822, table 3, line 3

ROOF

- Corrugated steel sheets, mineral wool insulation, PVC membrane
- Free load capacity of 15 kg/sqm for clients installations
- Min. 2% of skylights in warehouse area
- Syphonic drainage system, emergency overflows

FAÇADE

- Horizontal sandwich panels with mineral wool insulation
- Prefabricated concrete facade around docks to approx. 4.5m height
- Double glazed windows in offices with insulated PVC profiles

DOCKS

- 1x electrically operated 3 x 3.2 m dock for each 1,000 sqm of hall
- Each dock equipped with hydraulic leveler, 60 kN capacity, PE shelter, wheel guides
- 1x electrically operated 3.5 x 4.2 m drive-in gate for each 5,000 sqm of hall

HALL INSTALLATIONS

- Gas Sahara heaters or infrared gas radiators, heating according to norms for warehousing
- ESFR sprinklers under roof, FM Global certified tank and pumps
- 200 lux LED lighting (excluding influence of clients installations)
- 1x 630 kVA dry transformer station per each 25,000 sqm of hall

PRODUCTION UPGRADE (OPTIONAL)

- Increased facade and roof insulation
- Heating and ventilation in accordance with code for manufacturing (assembly)
- 300 lux LED lighting (excluding influence of clients installations)
- Increased percentage of skylights area

OFFICES

- 2 level custom designed in-built, incl. offices, socials, locker rooms, day room, excl. furniture and appliance
- Aluminium entrance door with canopy to entrance lobby
- Tiles, carpets or PVC floor surfaces, suspended mineral ceiling panels
- Social rooms with ceramic fixtures, wall tiles, and basic accessories
- PVC cable trays below windows, 2x 220V socket per work place
- Server room with 2 split units and antistatic PVC floor
- Top cooling

OUTSIDE AREAS

- Hard areas from concrete pavers, sloped for drainage
- 2m high mesh fence, entrance barriers and manual gate
- Green areas with grass, bushes, and trees